




45° Swept Female ORFS Swivel

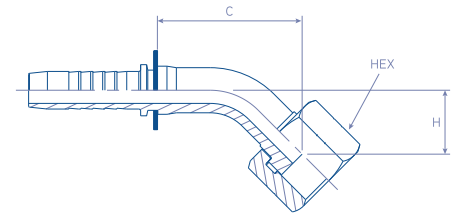

23.4444.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

| REFERENCE | hose dash | hose Ø inch | thread inch | C cut off mm | H mm | HEX mm |
|--------------|-----------|-------------|---------------|--------------|------|--------|
| 23.4444.0404 | -4 | 1/4" | 9/16" - 18 | 32.5 | 11.0 | 17 |
| 23.4444.0406 | -4 | 1/4" | 11/16" - 16 | 36.0 | 13.0 | 22 |
| 23.4444.0506 | -5 | 5/16" | 11/16" - 16 | 39.0 | 13.0 | 22 |
| 23.4444.0606 | -6 | 3/8" | 11/16" - 16 | 36.0 | 13.4 | 22 |
| 23.4444.0608 | -6 | 3/8" | 13/16" - 16 | 39.0 | 15.0 | 24 |
| 23.4444.0808 | -8 | 1/2" | 13/16" - 16 | 43.0 | 15.0 | 24 |
| 23.4444.0810 | -8 | 1/2" | 1" - 14 | 45.0 | 17.0 | 30 |
| 23.4444.0812 | -8 | 1/2" | 1.3/16" - 14 | 54.0 | 21.0 | 36 |
| 23.4444.1008 | -10 | 5/8" | 13/16" - 16 | 54.0 | 22.0 | 24 |
| 23.4444.1010 | -10 | 5/8" | 1" - 14 | 55.0 | 21.0 | 30 |
| 23.4444.1012 | -10 | 5/8" | 1.3/16" - 14 | 57.0 | 23.0 | 36 |
| 23.4444.1210 | -12 | 3/4" | 1" - 14 | 60.0 | 23.0 | 30 |
| 23.4444.1212 | -12 | 3/4" | 1.3/16" - 14 | 62.0 | 22.0 | 36 |
| 23.4444.1216 | -12 | 3/4" | 1.7/16" - 12 | 66.0 | 24.0 | 41 |
| 23.4444.1616 | -16 | 1" | 1.7/16" - 12 | 76.0 | 27.0 | 41 |
| 23.4444.1620 | -16 | 1" | 1.11/16" - 12 | 76.0 | 27.0 | 50 |
| 23.4444.2020 | -20 | 1.1/4" | 1.11/16" - 12 | 95.0 | 34.0 | 50 |
| 23.4444.2424 | -24 | 1.1/2" | 2" - 12 | 120.0 | 45.0 | 60 |

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)