


90° Swept Female SAE 45° Swivel

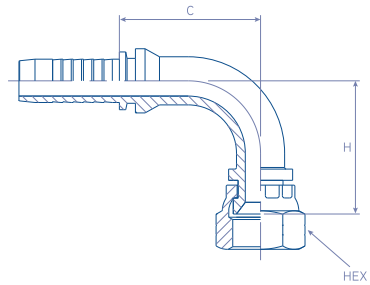

23.4S92.

SAE J512 / SAE J513


| REFERENCE | hose dash | hose Ø inch | thread | C cut off mm | H mm | HEX mm |
|--------------|--------------|----------------|------------------|-----------------|---------|-----------|
| 23.4S92.0506 | -5 | 5/16" | 5/8" - 18 UNF | 32.0 | 30.0 | 22 |
| 23.4S92.0606 | -6 | 3/8" | 5/8" - 18 UNF | 34.0 | 30.0 | 22 |
| 23.4S92.1212 | -12 | 3/4" | 1.1/16" - 14 UNS | 55.5 | 55.0 | 32 |

MATERIAL: Carbon Steel
FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

NOTES: On larger sizes nuts can be
supplied with Trust-Wire Nut (W)

SAE Inverted 45° Flare Male

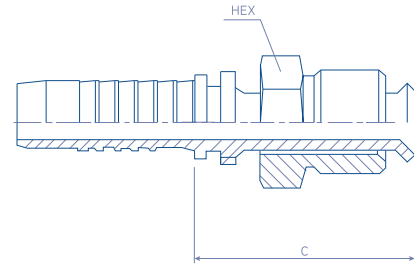

23.2210.

| REFERENCE | hose dash | hose Ø inch | thread | C cut off mm | HEX mm |
|--------------|--------------|----------------|---------------|-----------------|-----------|
| 23.2210.0404 | 04 | 1/4" | 7/16" - 24UNS | 42,0 | 11 |
| 23.2210.0405 | 04 | 1/4" | 1/2" - 20UNF | 47,0 | 13 |
| 23.2210.0406 | 04 | 1/4" | 5/8" - 18UNF | 46,0 | 16 |
| 23.2210.0604 | 04 | 3/8" | 7/16" - 24UNS | 42,0 | 11 |
| 23.2210.0605 | 06 | 3/8" | 1/2" - 20UNF | 44,0 | 13 |
| 23.2210.0606 | 06 | 3/8" | 5/8" - 18UNF | 46,0 | 16 |
| 23.2210.0808 | 08 | 1/2" | 3/4" - 18UNS | 47,0 | 19 |

MATERIAL: Carbon Steel
FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)