


Female JIC 37° Swivel with Back Hexagon

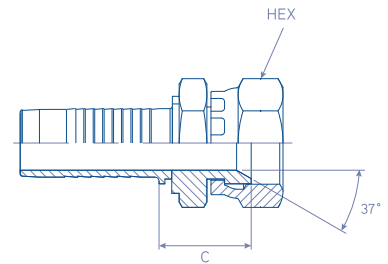

23.4H12.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	hose dash	hose Ø inch	thread inch	C cut off mm	W mm	HEX mm
23.4H12.0304	-3	3/16"	7/16" - 20	21.5	12	14
23.4H12.0404	-4	1/4"	7/16" - 20	20.7	14	14
23.4H12.0405	-4	1/4"	1/2" - 20	20.7	14	16
23.4H12.0406	-4	1/4"	9/16" - 18	22.7	14	19
23.4H12.0506	-5	5/16"	9/16" - 18	22.7	14	19
23.4H12.0606	-6	3/8"	9/16" - 18	21.0	17	19
23.4H12.0608	-6	3/8"	3/4" - 16	26.3	19	22
23.4H12.0610	-6	3/8"	7/8" - 14	28.0	22	27
23.4H12.0808	-8	1/2"	3/4" - 16	26.0	22	22
23.4H12.0810	-8	1/2"	7/8" - 14	29.0	22	27
23.4H12.0812	-8	1/2"	1.1/16" - 12	33.0	25	32
23.4H12.1010	-10	5/8"	7/8" - 14	28.5	22	27
23.4H12.1012	-10	5/8"	1.1/16" - 12	33.5	27	32
23.4H12.1212	-12	3/4"	1.1/16" - 12	33.7	27	32
23.4H12.1214	-12	3/4"	1.3/16" - 12	35.2	32	38
23.4H12.1216	-12	3/4"	1.5/16" - 12	35.2	32	38
23.4H12.1616	-16	1"	1.5/16" - 12	35.5	32	38
23.4H12.1620	-16	1"	1.5/8" - 12	40.5	42	50
23.4H12.2020	-20	1.1/4"	1.5/8" - 12	42.0	42	50
23.4H12.2424	-24	1.1/2"	1.7/8" - 12	45.0	50	57
23.4H12.3232	-32	2"	2.1/2" - 12	49.0	64	75

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)