




Straight SUPERCAT Flange

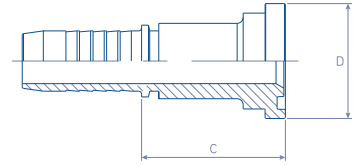

23.7116.

ISO 6162-2 / ISO 12151-3 / SAE J516 / SAE J518


REFERENCE	hose dash	hose Ø inch	D Ø flange mm	C cut off mm
23.7116.0808	-8	1/2"	31.8	46.0
23.7116.0812	-8	1/2"	31.8	46.0
23.7116.1012	-10	5/8"	41.3	46.0
23.7116.1212	-12	3/4"	41.3	46.0
23.7116.1216	-12	3/4"	47.6	56.0
23.7116.1616	-16	1"	47.6	57.0
23.7116.1620	-16	1"	54.0	65.0
23.7116.2020	-20	1.1/4"	54.0	66.0
23.7116.2024	-20	1.1/4"	63.5	75.0
23.7116.2424	-24	1.1/2"	63.5	75.0
23.7116.2432	-24	1.1/2"	79.4	80.0
23.7116.3232	-32	2"	79.4	85.0

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

45° Swept SUPERCAT Flange

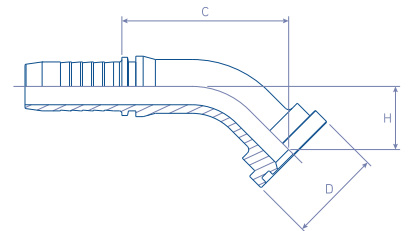

23.7146.

ISO 6162-1 / ISO 12151-3 / SAE J516 / SAE J518

REFERENCE	hose dash	hose Ø inch	D Ø flange mm	C cut off mm	H mm
23.7146.0808	-8	1/2"	31.8	57.0	23.0
23.7146.0812	-8	1/2"	31.8	63.0	30.0
23.7146.1012	-10	5/8"	41.3	68.0	28.0
23.7146.1212	-12	3/4"	41.3	69.0	28.0
23.7146.1216	-12	3/4"	47.6	77.0	33.0
23.7146.1616	-16	1"	47.6	79.0	32.0
23.7146.1620	-16	1"	54.0	93.0	38.0
23.7146.2020	-20	1.1/4"	54.0	110.0	44.0
23.7146.2024	-20	1.1/4"	63.5	112.0	48.0
23.7146.2424	-24	1.1/2"	63.5	110.0	46.0
23.7146.2432	-24	1.1/2"	79.4	134.0	58.0
23.7146.3232	-32	2"	79.4	155.0	64.0

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)