


# Interlock Male BSP Parallel Pipe (AGR)

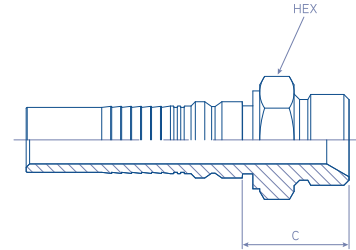

26.0100.

ISO 12151-6 / ISO 8434-6 / BS 5200


REFERENCE	hose dash	hose Ø inch	thread inch	C Cut Off mm	HEX mm
26.0100.1212	-12	3/4"	3/4" - 14	36.5	32
26.0100.1616	-16	1"	1" - 11	42.5	41
26.0100.2020	-20	1.1/4"	1.1/4" - 11	46.7	50
26.0100.2424	-24	1.1/2"	1.1/2" - 11	49.5	55
26.0100.3232	-32	2"	2" - 11	56.5	70

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating / ROHS compliant

**VERSIONS:** Stainless Steel (add an 'S' at the end of the REFERENCE)

# Interlock Female BSP Parallel Pipe with O-ring Swivel (DKOR)



26.3112.

ISO 12151-6 / ISO 8434-6 / BS 5200

REFERENCE	hose dash	hose Ø inch	thread inch	C Cut Off mm	HEX mm
26.3112.1212	-12	3/4"	3/4" - 14	22.0	32
26.3112.1616	-16	1"	1" - 11	25.2	38
26.3112.2020	-20	1.1/4"	1.1/4" - 11	29.2	50
26.3112.2424	-24	1.1/2"	1.1/2" - 11	30.5	55
26.3112.3232	-32	2"	2" - 11	31.0	70

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating / ROHS compliant

**VERSIONS:** Stainless Steel (add an 'S' at the end of the REFERENCE)

**NOTES:** On larger sizes nuts can be supplied with Trust-Wire Nut (W)