


Interlock Male JIC 37° (AGJ)

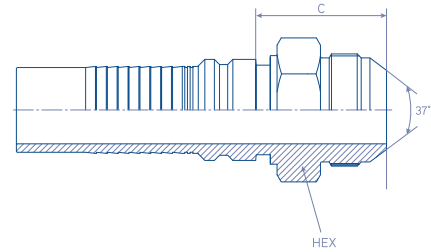

26.2000.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514


REFERENCE	hose dash	hose Ø inch	thread inch	C Cut Off mm	HEX mm
26.2000.1212	-12	3/4"	1.1/16" - 12	38.0	27
26.2000.1616	-16	1"	1.5/16" - 12	43.1	36
26.2000.2020	-20	1.1/4"	1.5/8" - 12	48.0	46
26.2000.2424	-24	1.1/2"	1.7/8" - 12	52.5	50
26.2000.3232	-32	2"	2.1/2" - 12	64.0	65

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)

Interlock Female JIC 37° Swivel (DKJ)

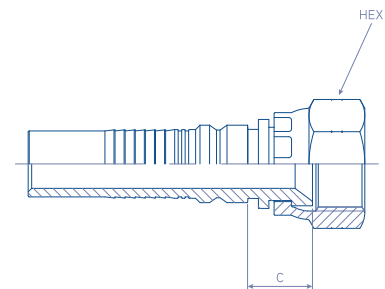

26.4012.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	hose dash	hose Ø inch	thread inch	C Cut Off mm	HEX mm
26.4012.1212	-12	3/4"	1.1/16" - 12	20.0	32
26.4012.1616	-16	1"	1.5/16" - 12	22.3	41
26.4012.2020	-20	1.1/4"	1.5/8" - 12	22.2	50
26.4012.2424	-24	1.1/2"	1.7/8" - 12	23.5	57
26.4012.3232	-32	2"	2.1/2" - 12	30.5	75

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)

NOTES: On larger sizes nuts can be supplied with Trust-Wire Nut (W)