




Interlock 45° Swept Female JIC 37° Swivel (DKJ 45°)

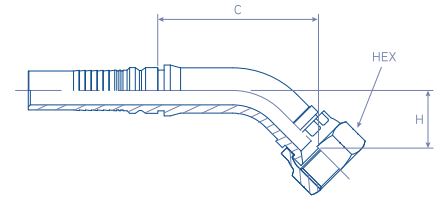

26.4042.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	hose dash	hose Ø inch	thread inch	C Cut Off mm	H mm	HEX mm
26.4042.1212	-12	3/4"	1.1/16" - 12	68.0	28.3	32
26.4042.1616	-16	1"	1.5/16" - 12	81.0	32.0	38
26.4042.2020	-20	1.1/4"	1.5/8" - 12	94.5	37.5	50
26.4042.2424	-24	1.1/2"	1.7/8" - 12	116.5	49.2	55
26.4042.3232	-32	2"	2.1/2" - 12	148.0	64.0	75


MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)

NOTES: On larger sizes nuts can be supplied with Trust-Wire Nut (W)

Interlock 90° Swept Female JIC 37° Swivel (DKJ 90°)

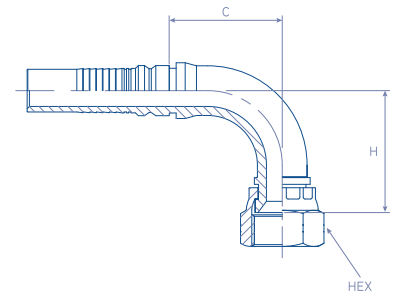

26.4092.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	hose dash	hose Ø inch	thread inch	C Cut Off mm	H mm	HEX mm
26.4092.1212	-12	3/4"	1.1/16" - 12	59.0	55.0	32
26.4092.1616	-16	1"	1.5/16" - 12	75.0	71.0	38
26.4092.2020	-20	1.1/4"	1.5/8" - 12	89.0	77.0	50
26.4092.2424	-24	1.1/2"	1.7/8" - 12	107.0	100.0	57
26.4092.3232	-32	2"	2.1/2" - 12	135.0	140.0	75

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)

NOTES: On larger sizes nuts can be supplied with Trust-Wire Nut (W)