




Interlock 45° Swept Female ORFS Swivel

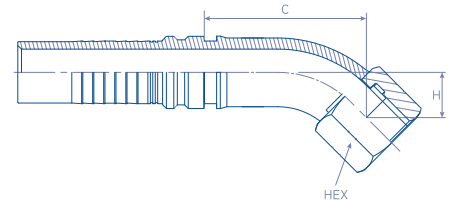

26.4444.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514


REFERENCE	hose dash	hose Ø inch	thread inch	C Cut Off mm	H mm	HEX mm
26.4444.1212	-12	3/4"	1.3/16" - 14	60.0	23.1	36
26.4444.1616	-16	1"	1.7/16" - 12	76.0	28.5	41
26.4444.2020	-20	1.1/4"	1.11/16" - 12	95.0	37.0	50
26.4444.2424	-24	1.1/2"	2" - 12	120.0	46.0	60

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)

Interlock 90° Swept Female ORFS Swivel

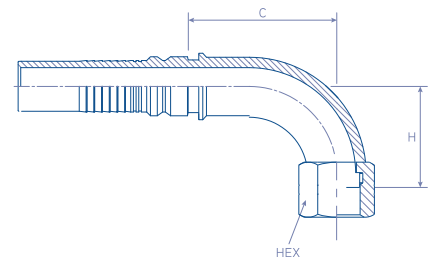

26.4494.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	hose dash	hose Ø inch	thread inch	C Cut Off mm	H mm	HEX mm
26.4494.1212	-12	3/4"	1.3/16" - 14	56.0	52.0	36
26.4494.1616	-16	1"	1.7/16" - 12	72.0	62.5	41
26.4494.2020	-20	1.1/4"	1.11/16" - 12	86.0	77.0	50
26.4494.2424	-24	1.1/2"	2" - 12	98.0	94.0	60

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)