


Interlock 45° Swept SAE 6000 PSI (code 62) Flange (SFS 45°)

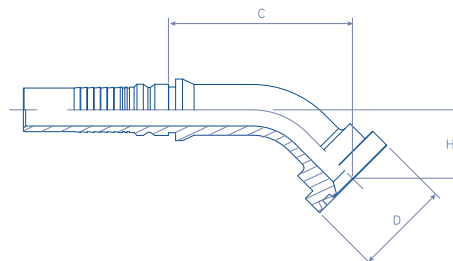

26.7046.

ISO 6162-1 / ISO 12151-3 / SAE J516 / SAE J518


| | hose | hose Ø | D Ø Flange | C Cut Off | H |
|--------------|------|--------|---------------|--------------|------|
| REFERENCE | dash | inch | mm | mm | mm |
| 26.7046.1212 | -12 | 3/4" | 41.3 | 69.0 | 29.5 |
| 26.7046.1216 | -12 | 3/4" | 47.6 | 77.0 | 33.0 |
| 26.7046.1616 | -16 | 1" | 47.6 | 79.0 | 31.0 |
| 26.7046.1620 | -16 | 1" | 54.0 | 99.0 | 39.0 |
| 26.7046.2020 | -20 | 1 1/4" | 54.0 | 110.0 | 44.0 |
| 26.7046.2024 | -20 | 1 1/4" | 63.5 | 112.7 | 48.0 |
| 26.7046.2424 | -24 | 1 1/2" | 63.5 | 115.0 | 47.0 |
| 26.7046.2432 | -24 | 1 1/2" | 79.4 | 131.3 | 57.0 |
| 26.7046.3232 | -32 | 2" | 79.4 | 154.0 | 64.0 |

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

Interlock 90° Swept SAE 6000 PSI (code 62) Flange (SFS 90°)

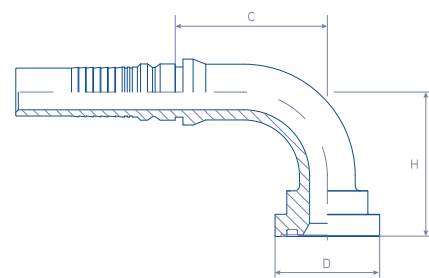

26.7096.

ISO 6162-1 / ISO 12151-3 / SAE J516 / SAE J518

| | hose | hose Ø | D Ø Flange | C Cut Off | H |
|--------------|------|--------|---------------|--------------|-------|
| REFERENCE | dash | inch | mm | mm | mm |
| 26.7096.1212 | -12 | 3/4" | 41.3 | 55.0 | 58.0 |
| 26.7096.1216 | -12 | 3/4" | 47.6 | 58.0 | 65.0 |
| 26.7096.1616 | -16 | 1" | 47.6 | 77.0 | 66.0 |
| 26.7096.1620 | -16 | 1" | 54.0 | 76.0 | 80.0 |
| 26.7096.2020 | -20 | 1 1/4" | 54.0 | 97.2 | 86.0 |
| 26.7096.2024 | -20 | 1 1/4" | 63.5 | 99.9 | 100.0 |
| 26.7096.2424 | -24 | 1 1/2" | 63.5 | 108.5 | 104.0 |
| 26.7096.2432 | -24 | 1 1/2" | 79.4 | 107.5 | 119.5 |
| 26.7096.3232 | -32 | 2" | 79.4 | 145.0 | 134.0 |

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)