




Interlock Straight SUPERCAT Flange

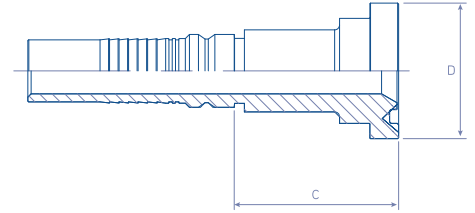

26.7116.

ISO 6162-2 / ISO 12151-3 / SAE J516 / SAE J518


REFERENCE	hose dash	hose Ø inch	D Ø Flange mm	C Cut Off mm
26.7116.1212	-12	3/4"	41.3	50.0
26.7116.1216	-12	3/4"	47.6	64.0
26.7116.1616	-16	1"	47.6	65.0
26.7116.1620	-16	1"	54.0	71.0
26.7116.2020	-20	1.1/4"	54.0	73.0
26.7116.2024	-20	1.1/4"	63.5	84.0
26.7116.2424	-24	1.1/2"	63.5	77.0
26.7116.2432	-24	1.1/2"	79.4	82.0
26.7116.3232	-32	2"	79.4	90.0

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

Interlock 45° Swept SUPERCAT Flange

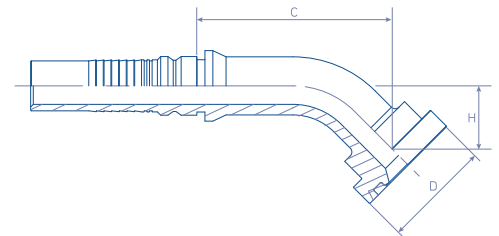

26.7146.

ISO 6162-2 / ISO 12151-3 / SAE J516 / SAE J518

REFERENCE	hose dash	hose Ø inch	D Ø Flange mm	C Cut Off mm	H mm
26.7146.1212	-12	3/4"	41.3	72.0	32.0
26.7146.1216	-12	3/4"	47.6	79.0	36.0
26.7146.1616	-16	1"	47.6	83.0	34.0
26.7146.1620	-16	1"	54.0	95.0	41.0
26.7146.2020	-20	1.1/4"	54.0	114.0	46.0
26.7146.2024	-20	1.1/4"	63.5	116.0	48.0
26.7146.2424	-24	1.1/2"	63.5	120.0	48.0
26.7146.2432	-24	1.1/2"	79.4	132.0	59.0
26.7146.3232	-32	2"	79.4	170.0	63.0

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)