




SAE Straight O-ring Boss Male - RA

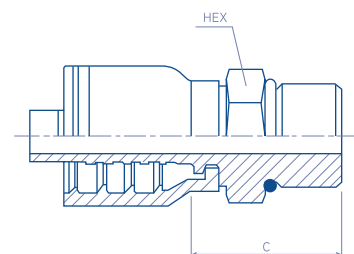

BF21.2010.

ISO 12151-5 / ISO 8434-2 / SAE J512 / SAE J513

REFERENCE	#	hose		thread	dimensions	
		dash	inch		C - Cut Off	HEX
BF2104-04RA	BF21.2010.0404	04	1/4"	7/16"-20	23,4	14
BF2106-06RA	BF21.2010.0606	06	3/8"	9/16"-18	23	17
BF2106-08RA	BF21.2010.0608	06	3/8"	3/4"-16	26,2	22
BF2108-08RA	BF21.2010.0808	08	1/2"	3/4"-16	27,9	22
BF2108-10RA	BF21.2010.0810	08	1/2"	7/8"-14	31,9	27
BF2108-12RA	BF21.2010.0812	08	1/2"	1.1/16"-12	36	32
BF2110-10RA	BF21.2010.1010	10	5/8"	7/8"-14	33,2	27
BF2110-12RA	BF21.2010.1012	10	5/8"	1.1/16"-12	37,4	32
BF2112-12RA	BF21.2010.1212	12	3/4"	1.1/16"-12	36,5	32
BF2112-16RA	BF21.2010.1216	16	1"	1.5/16"-12	39	41
BF2116-16RA	BF21.2010.1616	16	1"	1.5/16"-12	35,7	38

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W