


Male ORFS - OFTM

BF21.4000.

ISO 12151-1 / ISO 8434-3 / SAE J1453

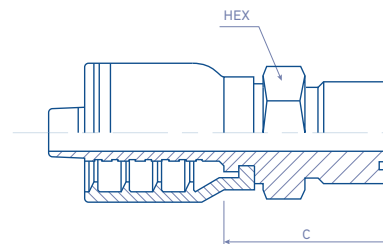

REFERENCE	#	hose		thread	dimensions	
		dash	inch		C - Cut Off	HEX
BF2104-04OFTM	BF21.4000.0404	04	1/4"	9/16"-18	24,9	17
BF2104-06OFTM	BF21.4000.0406	04	1/4"	1.1/16"-18	26,2	19
BF2106-06OFTM	BF21.4000.0606	06	3/8"	11/16"-18	26,0	19
BF2106-08OFTM	BF21.4000.0608	06	3/8"	1.3/16"-16	27,5	22
BF2108-08OFTM	BF21.4000.0808	08	1/2"	13/16"-16	29,7	22
BF2108-10OFTM	BF21.4000.0810	08	1/2"	1"-14	34,0	27
BF2108-12OFTM	BF21.4000.0812	08	1/2"	1.3/16"-12	38,2	32
BF2110-10OFTM	BF21.4000.1010	10	5/8"	1"-14	36,0	27
BF2110-12OFTM	BF21.4000.1012	10	5/8"	1.3/16"-12	38,5	32
BF2112-12OFTM	BF21.4000.1212	12	3/4"	1.3/16"-12	37,7	32
BF2112-16OFTM	BF21.4000.1216	12	3/4"	1.7/16"-12	42,2	41
BF2116-16OFTM	BF21.4000.1616	16	1"	1.7/16"-12	42,7	41

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W