




Light 24° Metric 45° Elbow Female - DLF45

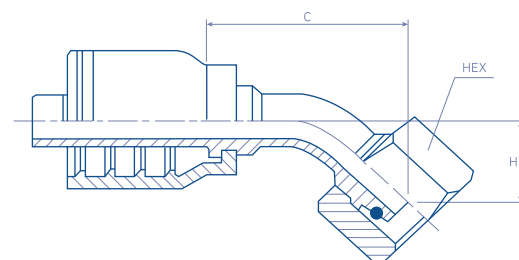

BF21.5043.

ISO 12151-2 / ISO 8434-1

REFERENCE	#	hose		thread	dimensions			
		dash	inch		d	C - Cut Off	H	HEX
BF2104-12DLF45	BF21.5043.0412	04	1/4"	M12X1.5	6	39	15	14
BF2104-14DLF45	BF21.5043.0414	04	1/4"	M14X1.5	8	42,7	17,7	17
BF2104-16DLF45	BF21.5043.0416	04	1/4"	M16X1.5	10	41,5	17,7	19
BF2104-18DLF45	BF21.5043.0418	04	1/4"	M18X1.5	12	42,0	18,3	22
BF2106-16DLF45	BF21.5043.0616	06	3/8"	M16X1.5	10	44,5	21	19
BF2106-18DLF45	BF21.5043.0618	06	3/8"	M18X1.5	12	42,5	19	22
BF2108-22DLF45	BF21.5043.0822	08	1/2"	M22X1.5	15	49,0	21,5	27
BF2108-26DLF45	BF21.5043.0826	08	1/2"	M26X1.5	18	60,0	25,0	32
BF2110-26DLF45	BF21.5043.1026	10	5/8"	M26X1.5	18	62,5	25	32
BF2112-30DLF45	BF21.5043.1230	12	3/4"	M30X2.0	22	76,0	29,5	36
BF2116-36DLF45	BF21.5043.1636	16	1"	M36X2.0	28	90,5	35	41

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W