




Male JIC 37° Rigid - MJ

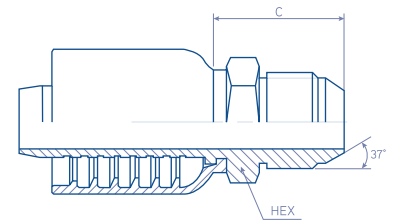

BW23.2000.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	#	hose		thread	dimensions	
		dash	inch		C - Cut Off	HEX
BW2304-04MJ	BW23.2000.0404	04	1/4"	7/16"-20	27,7	14
BW2304-05MJ	BW23.2000.0405	04	1/4"	1/2"-20	28,2	14
BW2304-06MJ	BW23.2000.0406	04	1/4"	9/16"-18	28,2	17
BW2306-06MJ	BW23.2000.0606	06	3/8"	9/16"-18	27,0	17
BW2306-08MJ	BW23.2000.0608	06	3/8"	3/4"-16	31,2	19
BW2306-10MJ	BW23.2000.0610	06	3/8"	7/8"-14	48,0	24
BW2308-06MJ	BW23.2000.0806	08	1/2"	9/16"-18	29,6	19
BW2308-08MJ	BW23.2000.0808	08	1/2"	3/4"-16	32,2	22
BW2308-10MJ	BW23.2000.0810	08	1/2"	7/8"-14	37,3	24
BW2308-12MJ	BW23.2000.0812	08	1/2"	1.1/16"-12	41,4	27
BW2310-08MJ	BW23.2000.1008	10	5/8"	3/4"-16	38,0	24
BW2310-10MJ	BW23.2000.1010	10	5/8"	7/8"-14	39,3	24
BW2310-12MJ	BW23.2000.1012	10	5/8"	1.1/16"-12	42,0	27
BW2312-10MJ	BW23.2000.1210	12	3/4"	7/8"-14	40,0	27
BW2312-12MJ	BW23.2000.1212	12	3/4"	1.1/16"-12	41,7	27
BW2312-14MJ	BW23.2000.1214	12	3/4"	1.3/16"-12	46,5	32
BW2312-16MJ	BW23.2000.1216	12	3/4"	1.5/16"-12	47,1	36
BW2316-16MJ	BW23.2000.1616	16	1"	1.5/16"-12	44,5	36
BW2316-20MJ	BW23.2000.1620	16	1"	1.5/8"-12	46,0	46
BW2320-20MJ	BW23.2000.2020	20	1.1/4"	1.5/8"-12	48,0	46
BW2324-24MJ	BW23.2000.2424	24	1.1/2"	1.7/8"-12	58,9	50
BW2332-32MJ	BW23.2000.3232	32	2"	2.1/2"-12	70,5	65

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN;
FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN;
BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM
TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK
SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12;
BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" &
1"); POWERSPIR BESTFLEX R15 (3/4" & 1")