


# SAE Straight O-ring Boss Male - RA

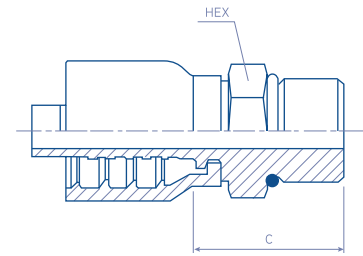

BW23.2010.

ISO 12151-5 / ISO 8434-2 / SAE J512 / SAE J513

REFERENCE	#	hose		thread	dimensions	
		dash	inch		C - Cut Off	HEX
BW2304-04RA	BW23.2010.0404	04	1/4"	7/16"-20	23,4	14
BW2306-06RA	BW23.2010.0606	06	3/8"	9/16"-18	23	17
BW2306-08RA	BW23.2010.0608	06	3/8"	3/4"-16	26,2	22
BW2308-08RA	BW23.2010.0808	08	1/2"	3/4"-16	27,9	22
BW2308-10RA	BW23.2010.0810	08	1/2"	7/8"-14	31,9	27
BW2308-12RA	BW23.2010.0812	08	1/2"	1.1/16"-12	36	32
BW2310-10RA	BW23.2010.1010	10	5/8"	7/8"-14	33,2	27
BW2310-12RA	BW23.2010.1012	10	5/8"	1.1/16"-12	37,4	32
BW2312-12RA	BW23.2010.1212	12	3/4"	1.1/16"-12	36,5	32
BW2312-16RA	BW23.2010.1216	12	3/4"	1.5/16"-12	39	41
BW2316-16RA	BW23.2010.1616	16	1"	1.5/16"-12	35,7	38

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating / ROHS compliant

## Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12; BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" & 1"); POWERSPIR BESTFLEX R15 (3/4" & 1")