




SAE Straight Swivel O-ring Boss Male - RAX

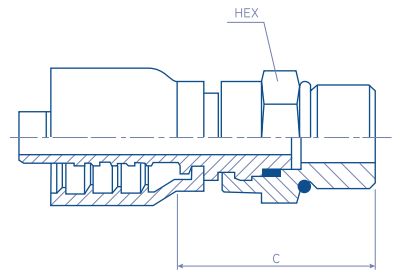

BW23.2012.

ISO 12151-5 / ISO 8434-2 / SAE J512 / SAE J513

REFERENCE	#	hose		thread	dimensions	
		dash	inch		C - Cut Off	HEX
BW2304-04RAX	BW23.2012.0404	04	1/4"	7/16"-20	39,7	19
BW2304-06RAX	BW23.2012.0406	04	1/4"	9/16"-18	40,2	19
BW2306-06RAX	BW23.2012.0606	06	3/8"	9/16"-18	38,2	19
BW2306-08RAX	BW23.2012.0608	06	3/8"	3/4"-16	42,7	22
BW2308-08RAX	BW23.2012.0808	08	1/2"	3/4"-16	44,5	22
BW2308-10RAX	BW23.2012.0810	08	1/2"	7/8"-14	38,0	27
BW2308-12RAX	BW23.2012.0812	08	1/2"	1.1/16"-12	47,3	32
BW2310-10RAX	BW23.2012.1010	10	5/8"	7/8"-14	39,5	27
BW2312-12RAX	BW23.2012.1212	12	3/4"	1.1/16"-12	48,1	32
BW2312-16RAX	BW23.2012.1216	12	3/4"	1.5/16"-12	53,1	41
BW2316-16RAX	BW23.2012.1616	16	1"	1.5/16"-12	53,0	41

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12; BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" & 1"); POWERSPIR BESTFLEX R15 (3/4" & 1")