


SAE 90° Elbow Swivel O-ring Boss Male - RAX90

BW23.2092.

ISO 12151-5 / ISO 8434-2 / SAE J512 / SAE J513

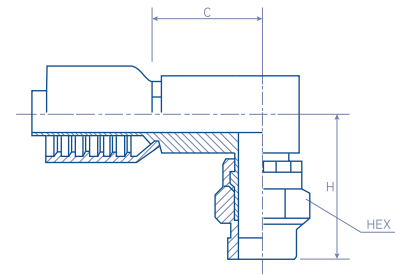

REFERENCE	#	hose		thread	dimensions		
		dash	inch		C - Cut Off	H	HEX
BW2306-06RA90X	BW23.2092.0606	06	3/8"	9/16"-18	38,0	50,0	43,3
BW2306-08RA90X	BW23.2092.0608	06	3/8"	3/4"-16	40,0	47,0	45,0
BW2308-08RA90X	BW23.2092.0808	08	1/2"	3/4"-16	43,0	47,0	45,0
BW2308-10RA90X	BW23.2092.0810	08	1/2"	7/8"-14	43,0	49,0	39,5
BW2312-12RA90X	BW23.2092.1212	12	3/4"	1.1/16"-12	48,0	58,0	51,7

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN;
FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN;
BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM
TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK
SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12;
BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" &
1"); POWERSPIR BESTFLEX R15 (3/4" & 1")