


SAE Inverted 45° Flare Male - MSAE

BW23.2210.

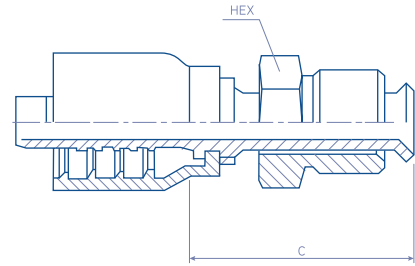

REFERENCE	#	hose		thread	dimensions	
		dash	inch		C - Cut Off	HEX
BW2304-04-M-SAE	BW23.2210.0404	04	1/4"	7/16" - 24UNS	42,0	11
BW2304-05-M-SAE	BW23.2210.0405	04	1/4"	1/2" - 20UNF	47,0	13
BW2304-06-M-SAE	BW23.2210.0406	04	1/4"	5/8" - 18UNF	46,0	16
BW2306-04-M-SAE	BW23.2210.0604	04	3/8"	7/16" - 24UNS	42,0	11
BW2306-05-M-SAE	BW23.2210.0605	06	3/8"	1/2" - 20UNF	44,0	13
BW2306-06-M-SAE	BW23.2210.0606	06	3/8"	5/8" - 18UNF	46,0	16
BW2308-08-M-SAE	BW23.2210.0808	08	1/2"	3/4" - 18UNS	47,0	19

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN;
FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN;
BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM
TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK
SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12;
BALMASTER BESTFLEX 4SP