




Female NPSM Pipe Swivel - FPX

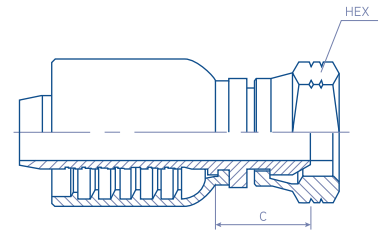

BW23.3010.

SAE J516 / SAE J514

REFERENCE	#	hose		thread	dimensions	
		dash	inch		C - Cut Off	HEX
BW2304-02FPX	BW23.3010.0402	04	1/4"	1/8"-27	23,7	14
BW2304-04FPX	BW23.3010.0404	04	1/4"	1/4"-18	26,7	19
BW2304-06FPX	BW23.3010.0406	04	1/4"	3/8"-18	29,1	22
BW2306-06FPX	BW23.3010.0606	06	3/8"	3/8"-18	27,2	22
BW2306-08FPX	BW23.3010.0608	06	3/8"	1/2"-14	29,0	27
BW2308-08FPX	BW23.3010.0808	08	1/2"	1/2"-14	30,7	27
BW2312-12FPX	BW23.3010.1212	12	3/4"	3/4"-14	35,3	32
BW2316-16FPX	BW23.3010.1616	16	1"	1"-11.5	38,0	41

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12; BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" & 1"); POWERSPIR BESTFLEX R15 (3/4" & 1")