


BSP 60° Swivel 45° Elbow Female - BSPXF45

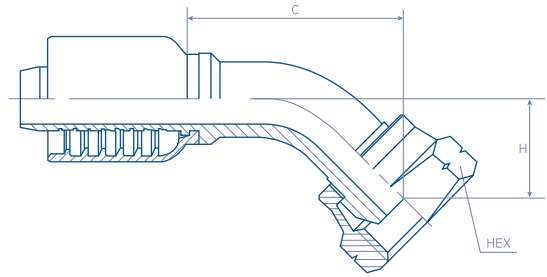

BW23.3042.

ISO 12151-6 / ISO 8434-6

REFERENCE	#	hose		thread	dimensions		
		dash	inch		C - Cut Off	H	HEX
BW2304-02BSPXF45	BW23.3042.0402	04	1/4"	1/8"-28	33,0	14,0	14
BW2304-04BSPXF45	BW23.3042.0404	04	1/4"	1/4"-19	41,1	15,0	19
BW2304-06BSPXF45	BW23.3042.0406	04	1/4"	3/8"-19	34,2	15,0	22
BW2306-06BSPXF45	BW23.3042.0606	06	3/8"	3/8"-19	40,0	17,5	22
BW2306-08BSPXF45	BW23.3042.0608	06	3/8"	1/2"-14	38,6	17,0	27
BW2308-08BSPXF45	BW23.3042.0808	08	1/2"	1/2"-14	46,0	19,0	27
BW2308-10BSPXF45	BW23.3042.0810	08	1/2"	5/8"-14	56,0	23,0	27
BW2310-10BSPXF45	BW23.3042.1010	10	5/8"	5/8"-14	60,5	23,3	27
BW2310-12BSPXF45	BW23.3042.1012	10	5/8"	3/4"-14	63,0	28,0	32
BW2312-12BSPXF45	BW23.3042.1212	12	3/4"	3/4"-14	67,8	29,0	32
BW2312-16BSPXF45	BW23.3042.1216	12	3/4"	1"-11	72,6	27,5	38
BW2316-16BSPXF45	BW23.3042.1616	16	1"	1"-11	83,7	33,8	38
BW2316-20BSPXF45	BW23.3042.1620	16	1"	1.1/4"-11	92,3	41,0	50
BW2320-20BSPXF45	BW23.3042.2020	20	1.1/4"	1.1/4"-11	97,0	40,0	50
BW2320-24BSPXF45	BW23.3042.2024	20	1.1/4"	1.1/2"-11	102,0	50,0	55
BW2324-24BSPXF45	BW23.3042.2424	24	1.1/2"	1.1/2"-11	119,0	50,0	55
BW2324-32BSPXF45	BW23.3042.2432	24	1.1/2"	2"-11	132,0	59,0	70
BW2332-32BSPXF45	BW23.3042.3232	32	2"	2"-11	149,8	70,0	70

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN;
FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN;
BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM
TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK
SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12;
BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" &
1"); POWERSPIR BESTFLEX R15 (3/4" & 1")