




BSP 60° Swivel 90° Elbow Female - BSPXF90

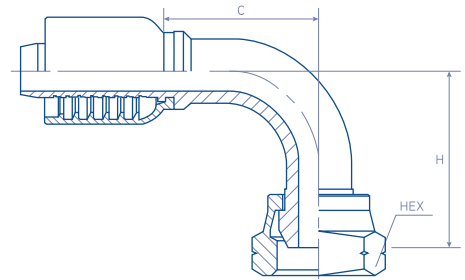

BW23.3092.

ISO 12151-6 / ISO 8434-6

REFERENCE	#	hose		thread	dimensions		
		dash	inch		C - Cut Off	H	HEX
BW2304-02BSPXF90	BW23.3092.0402	04	1/4"	1/8"-28	27,5	27,0	14
BW2304-04BSPXF90	BW23.3092.0404	04	1/4"	1/4"-19	27,6	28,0	19
BW2304-06BSPXF90	BW23.3092.0406	04	1/4"	3/8"-19	30,0	31,0	22
BW2306-06BSPXF90	BW23.3092.0606	06	3/8"	3/8"-19	34,2	31,7	22
BW2306-08BSPXF90	BW23.3092.0608	06	3/8"	1/2"-14	32,7	36,5	27
BW2308-08BSPXF90	BW23.3092.0808	08	1/2"	1/2"-14	41,0	40,0	27
BW2308-10BSPXF90	BW23.3092.0810	08	1/2"	5/8"-14	46,5	46,0	27
BW2310-10BSPXF90	BW23.3092.1010	10	5/8"	5/8"-14	54,0	50,0	27
BW2310-12BSPXF90	BW23.3092.1012	10	5/8"	3/4"-14	54,0	54,0	32
BW2312-12BSPXF90	BW23.3092.1212	12	3/4"	3/4"-14	56,0	58,0	32
BW2312-16BSPXF90	BW23.3092.1216	12	3/4"	1"-11	60,0	62,0	38
BW2316-16BSPXF90	BW23.3092.1616	16	1"	1"-11	71,5	71,0	38
BW2316-20BSPXF90	BW23.3092.1620	16	1"	1 1/4"-11	79,5	78,0	50
BW2320-20BSPXF90	BW23.3092.2020	20	1 1/4"	1 1/4"-11	86,5	83,0	50
BW2320-24BSPXF90	BW23.3092.2024	20	1 1/4"	1 1/2"-11	91,5	92,0	55
BW2324-24BSPXF90	BW23.3092.2424	24	1 1/2"	1 1/2"-11	110,0	104,0	55
BW2324-32BSPXF90	BW23.3092.2432	24	1 1/2"	2"-11	110,0	110,0	70
BW2332-32BSPXF90	BW23.3092.3232	32	2"	2"-11	130,0	130,0	70

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12; BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" & 1"); POWERSPIR BESTFLEX R15 (3/4" & 1")