




Male ORFS - OFTM

BW23.4000.

ISO 12151-1 / ISO 8434-3 / SAE J1453

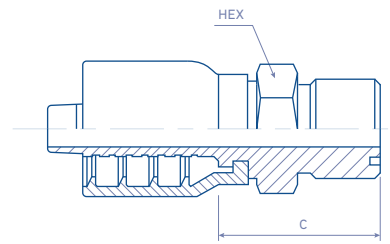

REFERENCE	#	hose		thread	dimensions	
		dash	inch		C - Cut Off	HEX
BW2304-04OFTM	BW23.4000.0404	04	1/4"	9/16"-18	24,9	17
BW2304-06OFTM	BW23.4000.0406	04	1/4"	1.1/16"-16	26,2	19
BW2306-06OFTM	BW23.4000.0606	06	3/8"	11/16"-16	26,0	19
BW2306-08OFTM	BW23.4000.0608	06	3/8"	13/16"-16	27,5	22
BW2308-08OFTM	BW23.4000.0808	08	1/2"	13/16"-16	29,7	22
BW2308-10OFTM	BW23.4000.0810	08	1/2"	1"-14	34,0	27
BW2308-12OFTM	BW23.4000.0812	08	1/2"	1.3/16"-12	38,2	32
BW2310-10OFTM	BW23.4000.1010	10	5/8"	1"-14	36,0	27
BW2310-12OFTM	BW23.4000.1012	10	5/8"	1.3/16"-12	38,5	32
BW2312-12OFTM	BW23.4000.1212	12	3/4"	1.3/16"-12	37,7	32
BW2312-16OFTM	BW23.4000.1216	12	3/4"	1.7/16"-12	42,2	41
BW2316-16OFTM	BW23.4000.1616	16	1"	1.7/16"-12	42,7	41
BW2320-20OFTM	BW23.4000.2020	20	1.1/4"	1.11/16"-12	40,5	46
BW2324-24OFTM	BW23.4000.2424	24	1.1/2"	2"-12	41,6	55

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12; BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" & 1"); POWERSPIR BESTFLEX R15 (3/4" & 1")