


Female JIC 37° Swivel 45° Elbow - FJ45

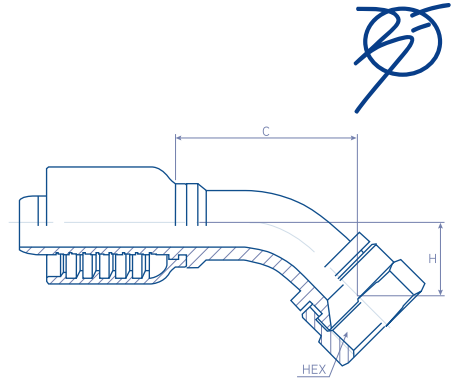

BW23.4042.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	#	hose		thread	dimensions		
		dash	inch		C - Cut Off	H	HEX
BW2304-04FJ45	BW23.4042.0404	04	1/4"	7/16"-20	35,0	10,5	14
BW2304-05FJ45	BW23.4042.0405	04	1/4"	1/2"-20	35,0	10,5	16
BW2304-06FJ45	BW23.4042.0406	04	3/8"	9/16"-18	35,0	10,5	19
BW2306-06FJ45	BW23.4042.0606	06	3/8"	9/16"-18	38,5	14,5	19
BW2306-08FJ45	BW23.4042.0608	06	3/8"	3/4"-16	41,0	16,0	22
BW2306-10FJ45	BW23.4042.0610	06	3/8"	7/8"-14	40,0	16,5	27
BW2308-08FJ45	BW23.4042.0808	08	1/2"	3/4"-16	44,5	18,0	22
BW2308-10FJ45	BW23.4042.0810	08	1/2"	7/8"-14	46,5	21,3	27
BW2308-12FJ45	BW23.4042.0812	08	1/2"	1.1/16"-12	48,0	23,0	32
BW2310-10FJ45	BW23.4042.1010	10	5/8"	7/8"-14	52,0	21,3	27
BW2310-12FJ45	BW23.4042.1012	10	5/8"	1.1/16"-12	64,0	27,0	32
BW2312-12FJ45	BW23.4042.1212	12	3/4"	1.1/16"-12	70,0	27,0	32
BW2312-16FJ45	BW23.4042.1216	12	3/4"	1.5/16"-12	72,0	30,0	38
BW2316-16FJ45	BW23.4042.1616	16	1"	1.5/16"-12	77,0	32,0	38
BW2316-20FJ45	BW23.4042.1620	16	1"	1.5/8"-12	83,0	36,0	50
BW2320-20FJ45	BW23.4042.2020	20	1.1/4"	1.5/8"-12	101,0	37,0	50
BW2320-24FJ45	BW23.4042.2024	20	1.1/4"	1.7/8"-12	102,0	38,0	57
BW2324-24FJ45	BW23.4042.2424	24	1.1/2"	1.7/8"-12	123,0	44,0	57
BW2332-32FJ45	BW23.4042.3232	32	2"	2.1/2"-12	148,0	65,0	75

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN;
FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN;
BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM
TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK
SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12;
BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" &
1"); POWERSPIR BESTFLEX R15 (3/4" & 1")