


# Female JIC 37° Swivel 90° Elbow - FJ90

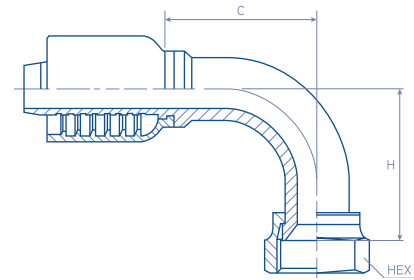

BW23.4092.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	#	hose		thread	dimensions		
		dash	inch		C - Cut Off	H	HEX
BW2304-04FJ90	BW23.4092.0404	04	1/4"	7/16"-20	26,0	24,5	14
BW2304-05FJ90	BW23.4092.0405	04	1/4"	1/2"-20	29,0	25,0	16
BW2304-06FJ90	BW23.4092.0406	04	3/8"	9/16"-18	29,0	25,0	19
BW2306-06FJ90	BW23.4092.0606	06	3/8"	9/16"-18	34,0	31,5	19
BW2306-08FJ90	BW23.4092.0608	06	3/8"	3/4"-16	35,0	30,0	22
BW2306-10FJ90	BW23.4092.0610	06	3/8"	7/8"-14	37,1	38,0	27
BW2308-08FJ90	BW23.4092.0808	08	1/2"	3/4"-16	42,5	40,0	22
BW2308-10FJ90	BW23.4092.0810	08	1/2"	7/8"-14	37,0	40,5	27
BW2308-12FJ90	BW23.4092.0812	08	1/2"	1.1/16"-12	47,0	50,0	32
BW2310-10FJ90	BW23.4092.1010	10	5/8"	7/8"-14	50,0	47,5	27
BW2310-12FJ90	BW23.4092.1012	10	5/8"	1.1/16"-12	54,0	55,0	32
BW2312-12FJ90	BW23.4092.1212	12	3/4"	1.1/16"-12	55,5	55,0	32
BW2312-16FJ90	BW23.4092.1216	12	3/4"	1.5/16"-12	55,5	65,0	38
BW2316-16FJ90	BW23.4092.1616	16	1"	1.5/16"-12	72,0	71,0	38
BW2316-20FJ90	BW23.4092.1620	16	1"	1.5/8"-12	80,0	74,0	50
BW2320-20FJ90	BW23.4092.2020	20	1.1/4"	1.5/8"-12	86,5	78,0	50
BW2320-24FJ90	BW23.4092.2024	20	1.1/4"	1.7/8"-12	86,5	90,0	57
BW2324-24FJ90	BW23.4092.2424	24	1.1/2"	1.7/8"-12	114,0	100,0	57
BW2332-32FJ90	BW23.4092.3232	32	2"	2.1/2"-12	130,5	140,0	75

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating /  
ROHS compliant

## Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN;  
FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN;  
BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM  
TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK  
SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12;  
BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" &  
1"); POWERSPIR BESTFLEX R15 (3/4" & 1")