


Heavy 24° Metric Female - DHF

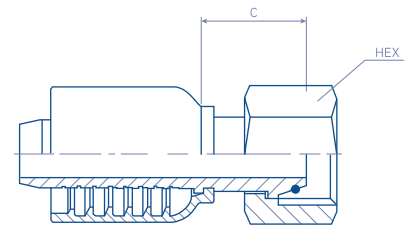

BW23.5113.

ISO 12151-2 / ISO 8434-1

REFERENCE	#	hose		thread	dimensions		
		dash	inch		d	C - Cut Off	HEX
BW2304-16DHF	BW23.5113.0416	04	1/4"	M16X1.5	8	27,0	19
BW2304-18DHF	BW23.5113.0418	04	1/4"	M18X1.5	10	27,5	22
BW2306-18DHF	BW23.5113.0618	06	3/8"	M18X1.5	10	25,5	22
BW2306-20DHF	BW23.5113.0620	06	3/8"	M20X1.5	12	25,0	24
BW2306-22DHF	BW23.5113.0622	06	3/8"	M22X1.5	14	29,5	27
BW2308-24DHF	BW23.5113.0824	08	1/2"	M24X1.5	16	31,0	30
BW2310-30DHF	BW23.5113.1030	10	5/8"	M30X2.0	20	38,4	36
BW2312-30DHF	BW23.5113.1230	12	3/4"	M30X2.0	20	37,5	36
BW2312-36DHF	BW23.5113.1236	12	3/4"	M36X2.0	25	41,8	46
BW2316-36DHF	BW23.5113.1636	16	1"	M36X2.0	25	42,5	46
BW2316-42DHF	BW23.5113.1642	16	1"	M42X2.0	30	45,7	50
BW2320-52DHF	BW23.5113.2052	20	1.1/4"	M52X2.0	38	46,0	60

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12; BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" & 1"); POWERSPIR BESTFLEX R15 (3/4" & 1")