




Heavy 24° Metric 45° Elbow Female - DHF45

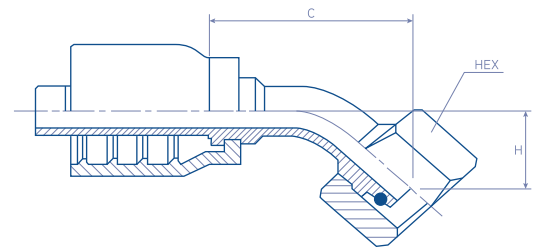

BW23.5143.

ISO 12151-2 / ISO 8434-1

| REFERENCE | # | hose | | thread | dimensions | | | |
|----------------|----------------|------|--------|---------|------------|-------------|------|-----|
| | | dash | inch | | d | C - Cut Off | H | HEX |
| BW2304-16DHF45 | BW23.5143.0416 | 04 | 1/4" | M16X1.5 | 8 | 36,5 | 17,0 | 19 |
| BW2304-18DHF45 | BW23.5143.0418 | 04 | 1/4" | M18X1.5 | 10 | 40,5 | 16,7 | 22 |
| BW2306-20DHF45 | BW23.5143.0620 | 06 | 3/8" | M20X1.5 | 12 | 42,0 | 18,4 | 24 |
| BW2306-22DHF45 | BW23.5143.0622 | 06 | 3/8" | M22X1.5 | 14 | 42,4 | 18,7 | 27 |
| BW2308-24DHF45 | BW23.5143.0824 | 08 | 1/2" | M24X1.5 | 16 | 49,9 | 21,0 | 30 |
| BW2310-30DHF45 | BW23.5143.1030 | 10 | 5/8" | M30X2.0 | 20 | 59,0 | 25,0 | 36 |
| BW2312-30DHF45 | BW23.5143.1230 | 12 | 3/4" | M30X2.0 | 20 | 70,5 | 30,0 | 36 |
| BW2312-36DHF45 | BW23.5143.1236 | 12 | 3/4" | M36X2.0 | 25 | 81,5 | 30,5 | 46 |
| BW2316-36DHF45 | BW23.5143.1636 | 16 | 1" | M36X2.0 | 25 | 89,0 | 36,0 | 46 |
| BW2316-42DHF45 | BW23.5143.1642 | 16 | 1" | M42X2.0 | 30 | 89,0 | 38,0 | 50 |
| BW2320-52DHF45 | BW23.5143.2052 | 20 | 1.1/4" | M52X2.0 | 38 | 123,0 | 45,0 | 60 |

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12; BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" & 1"); POWERSPIR BESTFLEX R15 (3/4" & 1")