




# 90° Swept Female BSP Parallel Pipe with O-ring Swivel (DKOR 90°)

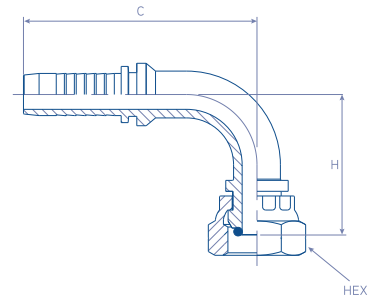

23.3192.

ISO 12151-6 / ISO 8434-6 / BS 5200

REFERENCE	hose dash	hose Ø inch	thread inch	C cut off mm	H mm	HEX mm
23.3192.0404	-4	1/4"	1/4" - 19	27.6	27,5	19
23.3192.0606	-6	3/8"	3/8" - 19	33.0	31,5	22
23.3192.0808	-8	1/2"	1/2" - 14	39,5	38,5	27
23.3192.1010	-10	5/8"	5/8" - 14	54,0	50,0	27
23.3192.1212	-12	3/4"	3/4" - 14	55,5	55,0	32
23.3192.1216	-12	3/4"	1" - 11	60,5	64,0	38
23.3192.1616	-16	1"	1" - 11	71,5	71,0	38
23.3192.1620	-16	1"	1.1/4" - 11	79,5	79,5	50
23.3192.2020	-20	1.1/4"	1.1/4" - 11	85,5	77,0	50
23.3192.2024	-20	1.1/4"	1.1/2" - 11	91,5	92,0	55
23.3192.2424	-24	1.1/2"	1.1/2" - 11	102,0	100,0	55
23.3192.2432	-24	1.1/2"	2" - 11	110,0	110,0	70
23.3192.3232	-32	2"	2" - 11	132,3	128,0	70

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating /  
ROHS compliant

**VERSIONS:** Stainless Steel (add an 'S'  
at the end of the REFERENCE)

**NOTES:** On larger sizes nuts can be  
supplied with Trust-Wire Nut (W)