




# 45° Swept Female JIC 37° Swivel (DKJ 45°)

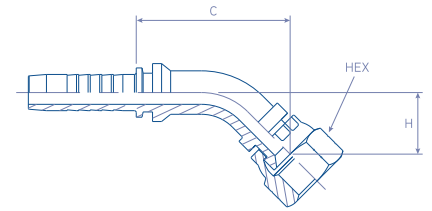

23.4042.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	hose dash	hose Ø inch	thread inch	C cut off mm	H mm	HEX mm
23.4042.0304	-3	3/16"	7/16" - 20	25.0	14.5	14
23.4042.0404	-4	1/4"	7/16" - 20	35.0	14.5	14
23.4042.0405	-4	1/4"	1/2" - 20	35.0	14.5	16
23.4042.0406	-4	1/4"	9/16" - 18	35.0	13.0	19
23.4042.0505	-5	5/16"	1/2" - 20	35.0	14.5	16
23.4042.0506	-5	5/16"	9/16" - 18	38.5	14.5	19
23.4042.0606	-6	3/8"	9/16" - 18	38.5	14.5	19
23.4042.0608	-6	3/8"	3/4" - 16	50.0	15.5	22
23.4042.0610	-6	3/8"	7/8" - 14	40.5	16.5	27
23.4042.0808	-8	1/2"	3/4" - 16	44.4	17.5	22
23.4042.0810	-8	1/2"	7/8" - 14	50.5	21.3	27
23.4042.0812	-8	1/2"	1.1/16" - 12	59.0	25.0	32
23.4042.1010	-10	5/8"	7/8" - 14	52.0	25.0	27
23.4042.1012	-10	5/8"	1.1/16" - 12	64.0	26.5	32
23.4042.1212	-12	3/4"	1.1/16" - 12	67.5	27.0	32
23.4042.1214	-12	3/4"	13/16" - 12	68.0	28.0	38
23.4042.1216	-12	3/4"	1.5/16" - 12	72.0	30.0	38
23.4042.1616	-16	1"	1.5/16" - 12	83.5	32.0	38
23.4042.1620	-16	1"	1.5/8" - 12	83.0	36.0	50
23.4042.2020	-20	1.1/4"	1.5/8" - 12	97.0	37.0	50
23.4042.2424	-24	1.1/2"	1.7/8" - 12	102.0	38.0	57
23.4042.2432	-24	1.1/2"	2.1/2" - 12	119.0	49.2	57
23.4042.3232	-32	2"	2.1/2" - 12	152.0	69.0	75

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating / ROHS compliant

**VERSIONS:** Stainless Steel (add an 'S' at the end of the REFERENCE)

**NOTES:** On larger sizes nuts can be supplied with Trust-Wire Nut (W)