


45° Swept SAE 3000 PSI (code 61) Flange (SFL 45°)

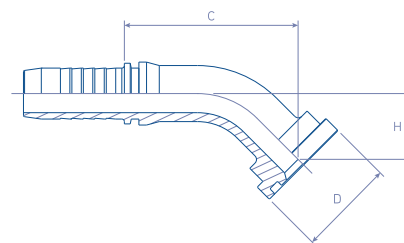

23.7043.

ISO 6162-1 / ISO 12151-3 / SAE J516 / SAE J518

REFERENCE	hose dash	hose Ø inch	D Ø flange mm	C cut off mm	H mm
23.7043.0808	-8	1/2"	30.2	57.0	23.0
23.7043.0812	-8	1/2"	38.1	63.0	28.0
23.7043.1010	-10	5/8"	34.0	67.0	28.0
23.7043.1012	-10	5/8"	38.1	68.0	28.0
23.7043.1212	-12	3/4"	38.1	69.0	28.0
23.7043.1216	-12	3/4"	44.5	75.0	32.0
23.7043.1616	-16	1"	44.5	76.0	31.0
23.7043.1620	-16	1"	50.8	85.0	35.0
23.7043.2020	-20	1.1/4"	50.8	95.0	36.0
23.7043.2024	-20	1.1/4"	60.3	100.0	38.0
23.7043.2424	-24	1.1/2"	60.3	100.0	40.0
23.7043.2432	-24	1.1/2"	71.4	110.0	42.0
23.7043.3232	-32	2"	71.4	145.0	56.0
23.7043.4040	-40	2.1/2"	84.1	135.0	58.0
23.7043.4848	-48	3"	101.6	136.0	58.0

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)

NOTES: Although not in the SAE
or the ISO standard the size 34.0mm
(5/8) is according to JIS standard