




Light 24° Metric Male - DLM

BF21.1000.

ISO 12151-2 / ISO 8434-1

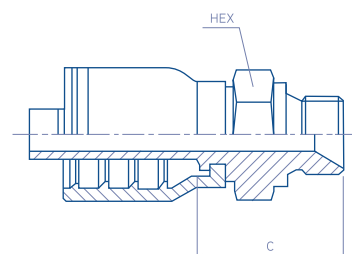

REFERENCE	#	hose		thread	dimensions		
		dash	inch		d	C - Cut Off	HEX
BF2104-12DLM	BF21.1000.0412	04	1/4"	M12X1.5	6	24,2	14
BF2104-14DLM	BF21.1000.0414	04	1/4"	M14X1.5	8	24,7	17
BF2104-16DLM	BF21.1000.0416	04	1/4"	M16X1.5	10	25,7	17
BF2104-18DLM	BF21.1000.0418	04	1/4"	M18X1.5	12	26,7	19
BF2106-16DLM	BF21.1000.0616	06	3/8"	M16X1.5	10	23,7	17
BF2106-18DLM	BF21.1000.0618	06	3/8"	M18X1.5	12	24,7	19
BF2106-22DLM	BF21.1000.0622	06	3/8"	M22X1.5	15	27,7	24
BF2108-18DLM	BF21.1000.0818	08	1/2"	M18X1.5	12	26,5	19
BF2108-22DLM	BF21.1000.0822	08	1/2"	M22X1.5	15	29,5	24
BF2110-26DLM	BF21.1000.1026	10	5/8"	M26X1.5	18	32,0	27
BF2110-30DLM	BF21.1000.1030	10	5/8"	M30X2.0	22	36,0	32
BF2112-30DLM	BF21.1000.1230	12	3/4"	M30X2.0	22	35,3	32
BF2116-36DLM	BF21.1000.1636	16	1"	M36X2.0	28	38,2	41

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W