




# Heavy 24° Metric Male - DHM

BF21.1100.

ISO 12151-2 / ISO 8434-1

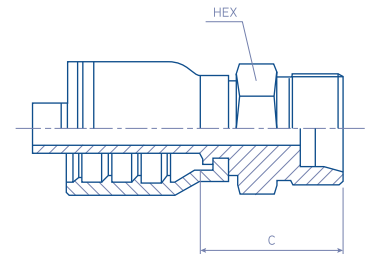

REFERENCE	#	hose		thread	dimensions		
		dash	inch		d	C - Cut Off	HEX
BF2104-14DHM	BF21.1100.0414	04	1/4"	M14X1.5	6	26,7	17
BF2104-16DHM	BF21.1100.0416	04	1/4"	M16X1.5	8	26,7	17
BF2104-18DHM	BF21.1100.0418	04	1/4"	M18X1.5	10	27,7	19
BF2104-20DHM	BF21.1100.0420	04	1/4"	M20X1.5	12	29,2	22
BF2106-18DHM	BF21.1100.0618	06	3/8"	M18X1.5	10	25,7	19
BF2106-20DHM	BF21.1100.0620	06	3/8"	M20X1.5	12	27,2	22
BF2106-22DHM	BF21.1100.0622	06	3/8"	M22X1.5	14	29,7	24
BF2106-24DHM	BF21.1100.0624	06	3/8"	M24X1.5	16	31,2	27
BF2108-24DHM	BF21.1100.0824	08	1/2"	M24X1.5	16	33,0	27
BF2110-30DHM	BF21.1100.1030	10	5/8"	M30X2.0	20	38,0	32

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating /  
ROHS compliant

## Suitable to be used on medium and high pressure braided hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W