


Light 24° Metric Female - DLF

BF21.5013.

ISO 12151-2 / ISO 8434-1

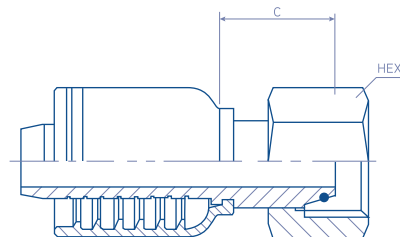

| REFERENCE | # | hose | | thread | dimensions | | |
|--------------|----------------|------|------|---------|------------|-------------|-----|
| | | dash | inch | | d | C - Cut Off | HEX |
| BF2104-12DLF | BF21.5013.0412 | 04 | 1/4" | M12X1.5 | 6 | 27,7 | 14 |
| BF2104-14DLF | BF21.5013.0414 | 04 | 1/4" | M14X1.5 | 8 | 25,9 | 17 |
| BF2104-16DLF | BF21.5013.0416 | 04 | 1/4" | M16X1.5 | 10 | 24,9 | 19 |
| BF2104-18DLF | BF21.5013.0418 | 04 | 1/4" | M18X1.5 | 12 | 26,4 | 22 |
| BF2106-16DLF | BF21.5013.0616 | 06 | 3/8" | M16X1.5 | 10 | 27,2 | 19 |
| BF2106-18DLF | BF21.5013.0618 | 06 | 3/8" | M18X1.5 | 12 | 25,5 | 22 |
| BF2106-22DLF | BF21.5013.0622 | 08 | 1/2" | M22X1.5 | 12 | 26,0 | 27 |
| BF2108-22DLF | BF21.5013.0822 | 08 | 1/2" | M22X1.5 | 15 | 27,7 | 27 |
| BF2108-26DLF | BF21.5013.0826 | 08 | 1/2" | M26X1.5 | 18 | 28,7 | 32 |
| BF2110-26DLF | BF21.5013.1026 | 10 | 5/8" | M26X1.5 | 18 | 30,0 | 32 |
| BF2112-30DLF | BF21.5013.1230 | 12 | 3/4" | M30X2.0 | 22 | 32,3 | 36 |
| BF2116-36DLF | BF21.5013.1636 | 16 | 1" | M36X2.0 | 28 | 35,8 | 41 |

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

Suitable to be used on medium and high pressure braided hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W