




# Female JIC 37° Swivel 90° Short Elbow - FJ90S

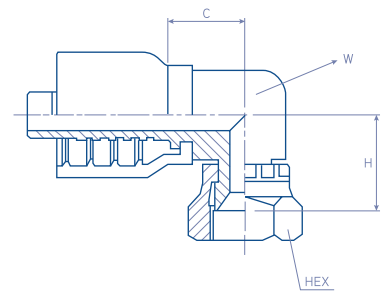

BW23.4082.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	#	hose		thread	dimensions			
		dash	inch		C - Cut Off	H	W	HEX
BW2304-04FJ90S	BW23.4082.0404	04	1/4"	7/16"-20	18,5	19,6	11	14
BW2304-05FJ90S	BW23.4082.0405	04	1/4"	1/2"-20	18,5	21,5	14	16
BW2304-06FJ90S	BW23.4082.0406	04	3/8"	9/16"-18	18,5	21,8	14	19
BW2306-06FJ90S	BW23.4082.0606	06	3/8"	9/16"-18	21,5	25,5	16	19
BW2306-08FJ90S	BW23.4082.0608	06	3/8"	3/4"-16	21,5	26,5	19	22
BW2308-08FJ90S	BW23.4082.0808	08	1/2"	3/4"-16	25,5	29,5	19	22
BW2308-10FJ90S	BW23.4082.0810	08	1/2"	7/8"-14	25,5	28,0	22	27
BW2310-10FJ90S	BW23.4082.1010	10	5/8"	7/8"-14	25,5	28,0	22	27
BW2312-12FJ90S	BW23.4082.1212	12	3/4"	1.1/16"-12	30,8	28,5	30,7	28,5
BW2312-16FJ90S	BW23.4082.1216	12	3/4"	1.5/16"-12	30,0	33,5	33	38
BW2316-16FJ90S	BW23.4082.1616	16	1"	1.5/16"-12	33,5	30,5	33,5	30,5

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating /  
ROHS compliant

## Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN;  
FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN;  
BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM  
TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK  
SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12;  
BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" &  
1"); POWERSPIR BESTFLEX R15 (3/4" & 1")