


Light 24° Metric Female - DLF

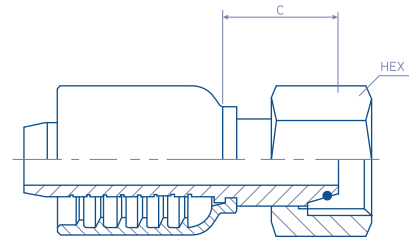

BW23.5013.

ISO 12151-2 / ISO 8434-1

REFERENCE	#	hose		thread	dimensions		
		dash	inch		d	C - Cut Off	HEX
BW2304-12DLF	BW23.5013.0412	04	1/4"	M12X1.5	6	27,7	14
BW2304-14DLF	BW23.5013.0414	04	1/4"	M14X1.5	8	25,9	17
BW2304-16DLF	BW23.5013.0416	04	1/4"	M16X1.5	10	24,9	19
BW2304-18DLF	BW23.5013.0418	04	1/4"	M18X1.5	12	26,4	22
BW2306-16DLF	BW23.5013.0616	06	3/8"	M16X1.5	10	27,2	19
BW2306-18DLF	BW23.5013.0618	06	3/8"	M18X1.5	12	25,5	22
BW2306-22DLF	BW23.5013.0622	06	3/8"	M22X1.5	12	26,0	27
BW2308-22DLF	BW23.5013.0822	08	1/2"	M22X1.5	15	27,7	27
BW2308-26DLF	BW23.5013.0826	08	1/2"	M26X1.5	18	28,7	32
BW2310-26DLF	BW23.5013.1026	10	5/8"	M26X1.5	18	30,0	32
BW2312-30DLF	BW23.5013.1230	12	3/4"	M30X2.0	22	32,3	36
BW2316-36DLF	BW23.5013.1636	16	1"	M36X2.0	28	35,8	41
BW2320-45DLF	BW23.5013.2045	20	1.1/4"	M45X2.0	35	38,9	50
BW2324-52DLF	BW23.5013.2452	24	1.1/2"	M52X2.0	42	36,9	60

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN; FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN; BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12; BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" & 1"); POWERSPIR BESTFLEX R15 (3/4" & 1")