




# Light 24° Metric 45° Elbow Female - DLF45

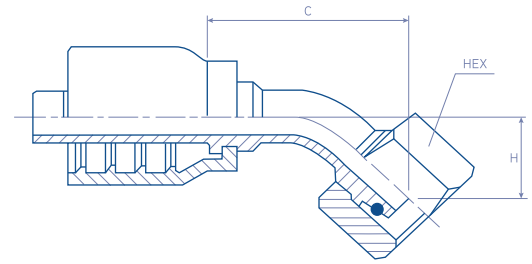

BW23.5043.

ISO 12151-2 / ISO 8434-1

| REFERENCE      | #              | hose |        | thread  | dimensions |             |      |     |
|----------------|----------------|------|--------|---------|------------|-------------|------|-----|
|                |                | dash | inch   |         | d          | C - Cut Off | H    | HEX |
| BW2304-12DLF45 | BW23.5043.0412 | 04   | 1/4"   | M12X1.5 | 6          | 39          | 15   | 14  |
| BW2304-14DLF45 | BW23.5043.0414 | 04   | 1/4"   | M14X1.5 | 8          | 42,7        | 17,7 | 17  |
| BW2304-16DLF45 | BW23.5043.0416 | 04   | 1/4"   | M16X1.5 | 10         | 41,5        | 17,7 | 19  |
| BW2304-18DLF45 | BW23.5043.0418 | 04   | 1/4"   | M18X1.5 | 12         | 42,0        | 18,3 | 22  |
| BW2306-16DLF45 | BW23.5043.0616 | 06   | 3/8"   | M16X1.5 | 10         | 44,5        | 21   | 19  |
| BW2306-18DLF45 | BW23.5043.0618 | 06   | 3/8"   | M18X1.5 | 12         | 42,5        | 19   | 22  |
| BW2308-22DLF45 | BW23.5043.0822 | 08   | 1/2"   | M22X1.5 | 15         | 49,0        | 21,5 | 27  |
| BW2308-26DLF45 | BW23.5043.0826 | 08   | 1/2"   | M26X1.5 | 18         | 60,0        | 25,0 | 32  |
| BW2310-26DLF45 | BW23.5043.1026 | 10   | 5/8"   | M26X1.5 | 18         | 62,5        | 25   | 32  |
| BW2312-30DLF45 | BW23.5043.1230 | 12   | 3/4"   | M30X2.0 | 22         | 76,0        | 29,5 | 36  |
| BW2316-36DLF45 | BW23.5043.1636 | 16   | 1"     | M36X2.0 | 28         | 90,5        | 35   | 41  |
| BW2320-45DLF45 | BW23.5043.2045 | 20   | 1,1/4" | M45X2.0 | 35         | 104         | 40   | 50  |
| BW2324-52DLF45 | BW23.5043.2452 | 24   | 1,1/2" | M52X2.0 | 42         | 119         | 41   | 60  |

**MATERIAL:** Carbon Steel

**FINISH:** Chromium-(VI) Free plating /  
ROHS compliant

## Suitable to be used on medium and high pressure braided and spiral hoses:

FORZA UNO R1AT/1SN; FORZA UNO "SHARK SKIN" R1AT/1SN; FORZA UNO TROPIC R1AT/1SN;  
FORZA DUE R2AT/2SN; FORZA DUE "SHARK SKIN" R2AT/2SN; FORZA DUE TROPIC R2AT/2SN;  
BALPAC PREMIUM R16/2SC; BALPAC PREMIUM "SHARK SKIN" R16/2SC; BALPAC PREMIUM  
TROPIC R16/2SC; IMPACTUS 5K; IMPACTUS 6K; BALPAC 3000 R17/1SC; BALPAC 3000 "SHARK  
SKIN" R17/1SC; 2-MAX JACK; BALWASH 1W; BALWASH 2W; BALMASTER BESTFLEX R12;  
BALMASTER BESTFLEX 4SP; POWERSPIR BESTFLEX 4SH; POWERSPIR BESTFLEX R13 (3/4" &  
1"); POWERSPIR BESTFLEX R15 (3/4" & 1")